


# Semi-electric Stacker

Hot Sale



Model:  
**CDD10B-III**  
**CDD15B-III**

Overall forks



CDDB-III  
Adjustable Forks


1KG=2.205LB 1INCH=25.40MM

Model		Overall forks		Adjustable forks	
		CDD10B - III	CDD15B - III	CDD10B - III	CDD15B - III
Load capacity	Q(kg)	1000	1500	1000	1500
Load centre distance	c(mm)	500	500	500	500
Load distance, centre of drive axle to fork	x(mm)	802	802	745	745
Tyre size, front	mm	φ 180x50	φ 180x50	φ 180x50	φ 180x50
Tyre size, rear	mm	φ 80x70	φ 80x70	φ 80x70	φ 80x70
Wheels, number front rear(x=driven wheels)		2/2	2/2	2/2	2/2
Fork height, lowered	$h_{13}$ (mm)	90		90	
Height, mast lowered	$h_1$ (mm)	2090/1840/2090/2240/2340		2090/1840/2090/2240/2340	
<b>Max. lift height</b>	<b><math>h_3</math>(mm)</b>	<b>1600/2500/3000/3300/3500</b>		<b>1600/2500/3000/3300/3500</b>	
Height, mast extended	$h_4$ (mm)	2090/3060/3560/3860/4060		2090/3060/3560/3860/4060	
Overall length	$l_1$ (mm)	1678	1740	1735	1835
Length to face of forks	$l_2$ (mm)	608	670	665	765
Overall width	$b_1$ (mm)	800	800	955	955
Fork dimensions	s/e/l(mm)	60/170/1070	60/170/1070	60/142/1070	60/142/1070
Width overall forks	$b_2$ (mm)	570/695	570/695	295-930	295-930
Aisle width for pallets 800x1200 lengthways	$A_{11}$ (mm)	2267	2347	2267	2347
Turning radius	$W_1$ (mm)	1425	1505	1425	1505
Lift speed, laden/unladen	m/s	0.07/0.09	0.07/0.09	0.07/0.09	0.07/0.09
Lowering speed, laden/unladen	m/s	0.1/0.13	0.1/0.13	0.1/0.13	0.1/0.13
Service brake		mechanical	mechanical	mechanical	mechanical
Battery voltage, nominal capacity $K_5$	V/Ah	12/120	12/120	12/120	12/120
Battery weight	kg	45	45	45	45
Battery dimensions l/w/h	mm	360x170x250	360x170x250	360x170x250	360x170x250
Service weight (with battery)	kg	355/410/445/475/495	405/475/480/530/550	385/440/475/505/525	435/510/535/560/580



Option of battery for CDD15B-III: 24V/120Ah



Conforms to EN ISO3691-1  
EN1175-1  
EN16307-1  
Based on Directive 2006/42/EC

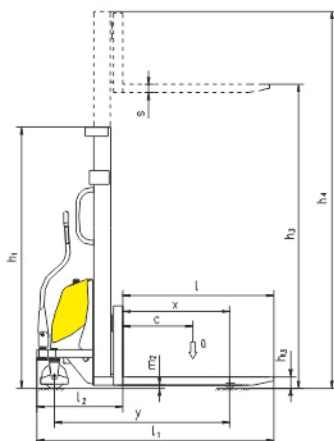

CDD10B - III / CDD15B - III Overall forks

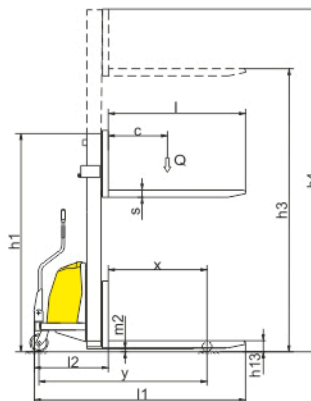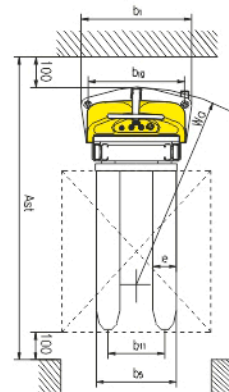

CDD10B - III / CDD15B - III Adjustable forks

